
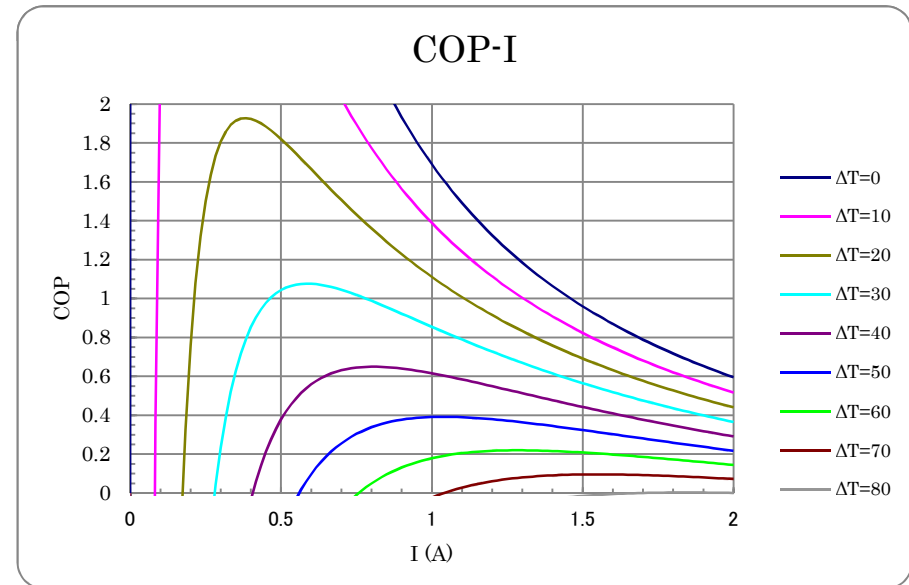
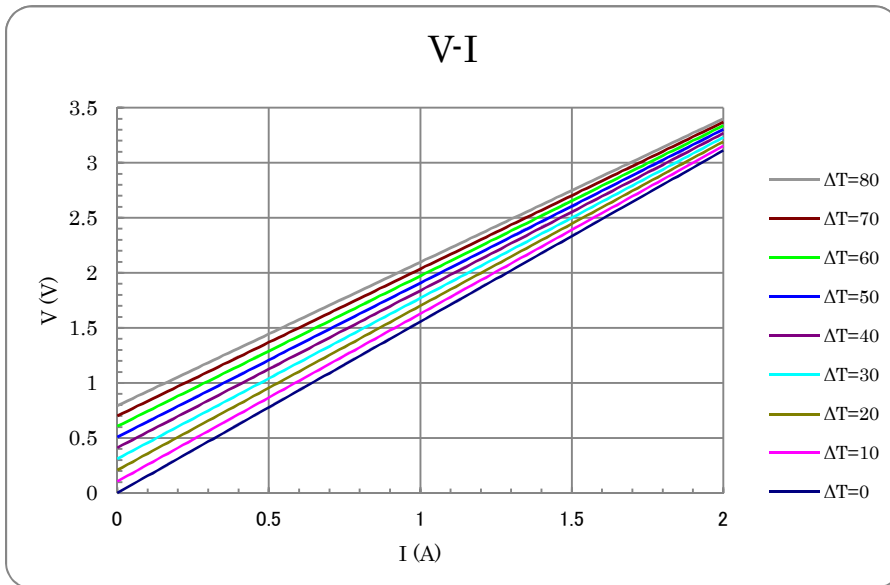
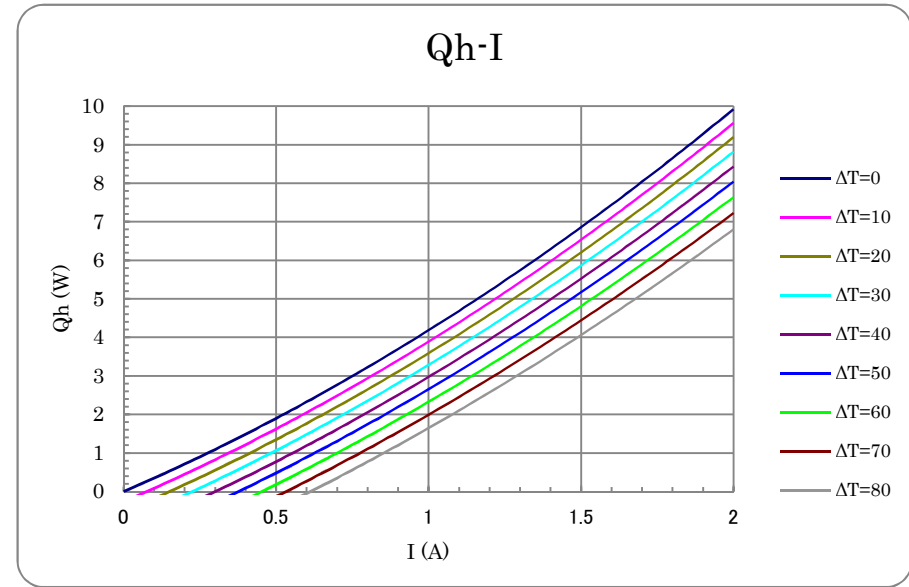


Th=50°C

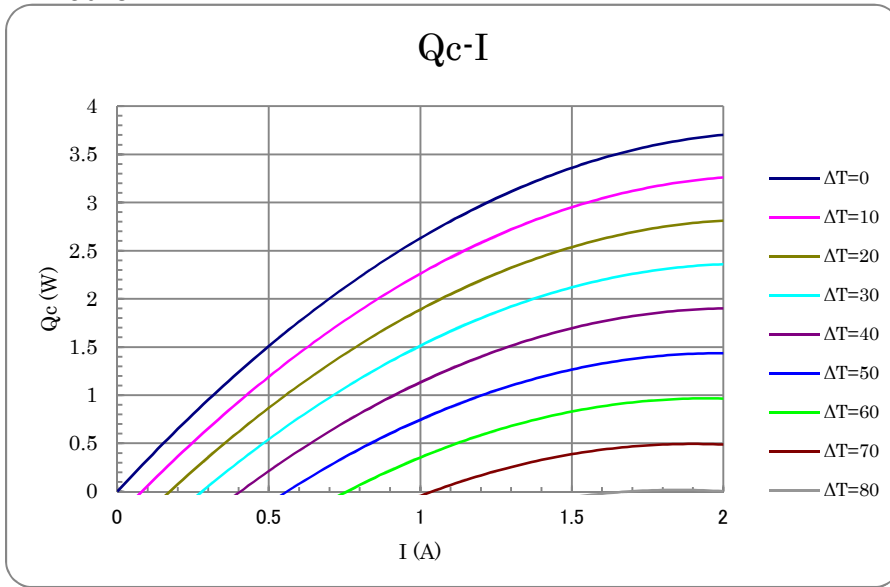

Th: Temperature of heat radiating side
 Q_c: Heat absorbed (pumped)
 I: Input current
 ΔT : Temperature difference between heat radiating side and heat absorbing side

V: Input voltage
 Q_h: Heat radiated
 COP: Coefficient of performance