


FERROTEC CONFIDENTIAL

- 1).The resistance of the module shall be within 1.082 to 1.322 ohms at an ambient temperature of 25 degrees Celsius.
- 2).The top substrate shall be cold side if connecting the under weld to the positive pole of the power.

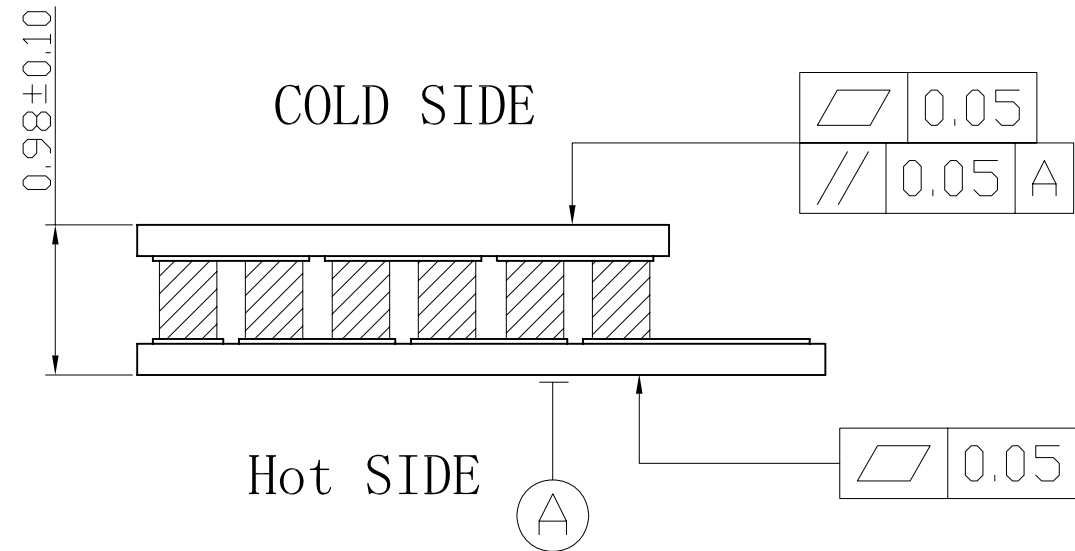

ROHS COMPLIANCE

Item	Value	Conditions
I _{max}	1.5A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	2.5V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	76°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	2.0W	I=I _{max} , DT=0, Th=50°C

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance				Pls	Date Modifying	Summary of Modification	By	Designed	Finished Mark	Title	Proj.
Process	Cutting		Forging	▲				Fangliang Hou	2013/11/09	200B5/018/015A	3
	common	special	Common					Checked			
Size range				▲				Yongqing Wu	2013/11/09	Drawing Number	1/1
Less than 6	±0.1	±0.15	±0.5	▲				Approved			
6 up to 30	±0.2	±0.2	±0.7	▲				Approved		P/N	Z
30 up to 120	±0.3	±0.2	±1.0	▲				Approved			
120 up to 315	±0.5	±0.25	±1.5	▲				Approved		Scale:	
315 up to 1000	±0.8	±0.4	±2.0	▲				Approved			Do not Scale
1000 up to 2000	±1.2	±0.6	±2.0	▲				Approved			