



FERROTEC CONFIDENTIAL

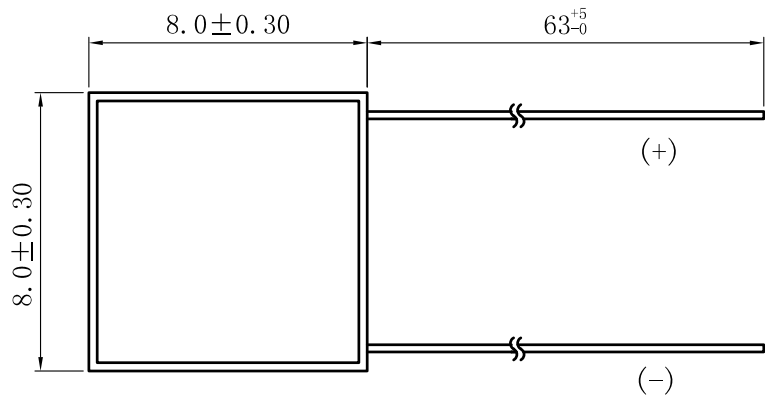

- 1). The resistance of the module is $1.430 - 1.741 \Omega$ (25°C).
- 2). The lead wires is tinned solid copper, AWG #30.
- 3). Both cold and hot surfaces of the substrates are plated with gold.

ROHS COMPLIANCE

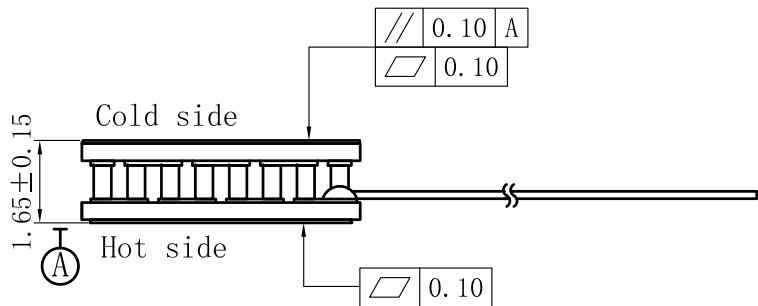

Item	Value	Conditions
I_{max}	2A	$Q_c=0, DT=DT_{max}, Th=50^\circ\text{C}$
V_{max}	4.6V	$Q_c=0, I=I_{max}, Th=50^\circ\text{C}$
DT_{max}	80°C	$Q_c=0, I=I_{max}, Th=50^\circ\text{C}$
Q_{cmax}	5.0W	$I=I_{max}, DT=0, Th=50^\circ\text{C}$
Th_{max}	200°C	Momentary

Ferrotec Corporation

(Zhijiang Factory)

668# Binkang Road, Hangzhou Hi-tech Garden, Zhejiang Province, P.R.China

General Dimension Tolerance				PLS	Date Modifying	Summary Of Modification	By	Designed	May. 13, 09	Finished Mark	Title	Proj.
Size Range	Cutting		Forging	▲				Jihong Mao	May. 13, 09	Material	△ 20001/031/020M	3
	Common	Special	Common									
less than 6	± 0.1			▲				Checked			Drawing Number T0906-0400E	1/1
6 up to 30	± 0.2	± 0.15	± 0.5	▲				Jihong Mao	May. 13, 09	Material		
30 up to 120	± 0.3	± 0.2	± 0.7	▲				Approved		Finish	P/N 85178	Scale Do Not Scale
120 up to 315	± 0.5	± 0.25	± 1.0	▲				Approved		Raw Material Size		
315 up to 1000	± 0.8	± 0.4	± 1.5	▲				Approved		Raw Material Weight		
1000 up to 2000	± 1.2	± 0.6	± 2.0	▲	1	Feb. 5, 2014	Spec. name change	Lj Qin			Rev.	A