



FERROTEC CONFIDENTIAL

- 1).The resistance of the module shall be within 1.185 to 1.441 ohms at an ambient temperature of 25 degrees Celsius.
- 2).Material of lead wires: #30 AWG Tinned Single strand.
- 3).All the surface of cold and hot side of module have been plated gold.

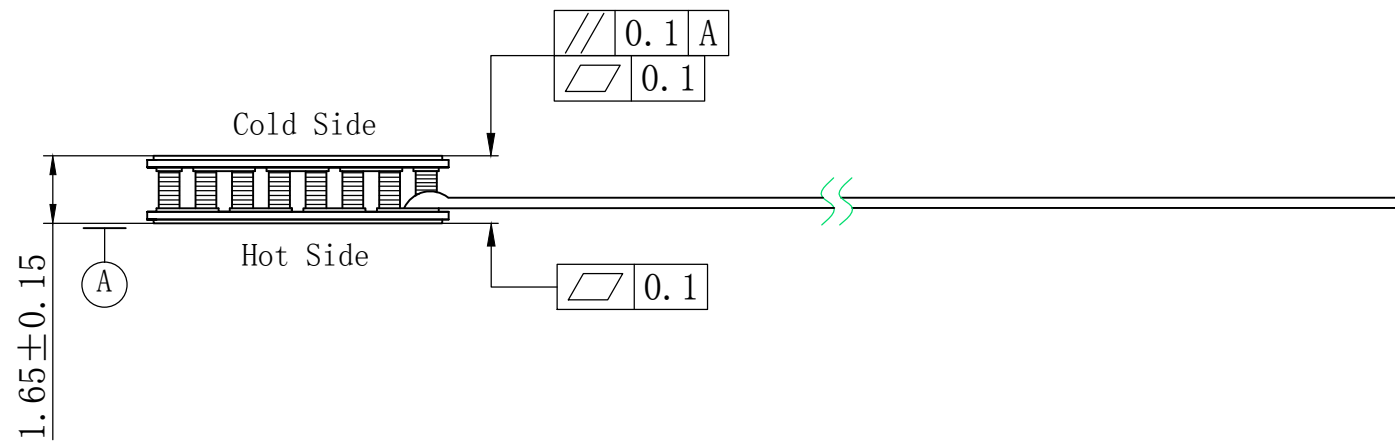

ROHS COMPLIANCE

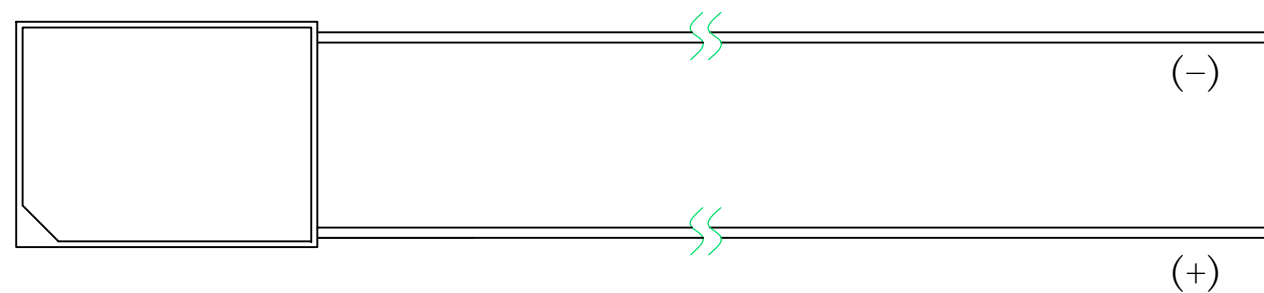

| Item | Value | Conditions |
|-------------------|-------|---|
| I _{max} | 1.8A | Q _c =0, DT=DT _{max} , Th=50°C |
| V _{max} | 3.4V | Q _c =0, I=I _{max} , Th=50°C |
| DT _{max} | 80°C | Q _c =0, I=I _{max} , Th=50°C |
| Q _{cmax} | 3.3W | I=I _{max} , DT=0, Th=50°C |

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

| General Dimension Tolerance | | | | PLs | Date Modifying | Summary Of Modification | By | Designed | Finished Mark | Title | Proj. |
|-----------------------------|------------|--------|---------|-----|----------------|-------------------------|----|-------------|---------------|----------------|---------------------------|
| Process | Cutting | | Forging | ▲ | | | | Jiang | 2014/06/05 | 20031/023/018M | 3 Angle |
| | Size Range | Common | Special | | | | | Common | Checked | | |
| less than 6 | ±0.1 | ±0.15 | ±0.5 | ▲ | | | | Yongqing Wu | 2014/06/05 | Drawing Number | 1/1 |
| 6 up to 30 | ±0.2 | | | ▲ | | | | Approved | | | |
| 30 up to 120 | ±0.3 | ±0.2 | ±0.7 | ▲ | | | | Approved | | P/N | Scale: Do Not Scale |
| 120 up to 315 | ±0.5 | ±0.25 | ±1.0 | ▲ | | | | Approved | | | |
| 315 up to 1000 | ±0.8 | ±0.4 | ±1.5 | ▲ | | | | FTA | Approved | | |
| 1000 up to 2000 | ±1.2 | ±0.6 | ±2.0 | ▲ | | | | | | | |